


AZSR190

90/100 AMP POWER RELAY

FEATURES

- Up to 100 Amp switching capability
- Wide contact gap of ≥ 3.6 mm
- Clearance and creepage of ≥ 10 mm
- 5 kV dielectric strength, 10 kV surge withstand voltage
- UL Class F insulation (155°C)
- UL / CUR E365652
- TÜV B0887930008

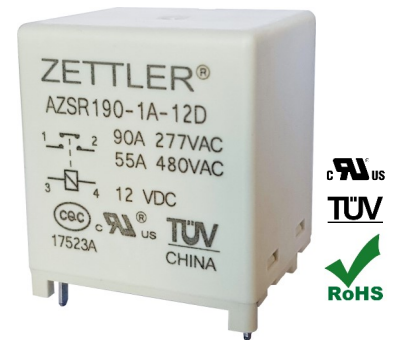

CONTACTS

Arrangement	SPST-N.O. (1 Form A)
Ratings (max.) standard version switched power switched current high current version switched power switched current switched voltage	(resistive load) 44000 VA 90 A 48000 VA 100 A 800 VAC
Rated Loads UL	55 A at 480 VAC, resistive, 85°C, 50k cycles 55 A at 690 VAC, resistive, 85°C, 20k cycles 55 A at 800 VAC, resistive, 85°C, 1k cycles 90 A at 480 VAC, resistive, 85°C, 1k cycles 100 A at 480 VAC, res., 85°C, 1k cycles ("T" version)
TÜV	30 A at 480 VAC, resistive, 85°C, 50k cycles 55 A at 480 VAC, resistive, 85°C, 30k cycles 55 A at 690 VAC, resistive, 85°C, 20k cycles 55 A at 800 VAC, resistive, 85°C, 1k cycles 90 A at 480 VAC, resistive, 85°C, 1k cycles 100 A at 480 VAC, res., 85°C, 1k cycles ("T" version)
Contact material	AgNi (silver nickel)
Contact gap	≥ 3.6 mm
Initial resistance	≤ 10 m Ω (10 A - voltage drop method)

COIL

Nominal coil DC voltages	6, 9, 12, 24
Dropout voltage	$\geq 10\%$ of nominal coil voltage
Holding voltage	$\geq 40\%$ of nominal coil voltage
Coil power nominal max. continuous at pickup voltage holding power	 1.9 W 2.3 W 1.1 W 310 mW
Temperature Rise	70 K (126°F) at nominal coil voltage
Max. temperature	Class F insulation - 155°C (311°F)

GENERAL DATA

Life Expectancy mechanical electrical	(minimum operations) 1 x 10 ⁶ 5 x 10 ⁴ at 55 A, 480 VAC, resistive, 85°C 1 x 10 ³ at 90 A, 480 VAC, resistive, 85°C
Operate Time Release Time	40 ms (max.) at nominal coil voltage 10 ms (max.) at nominal coil voltage, without coil suppression
Dielectric Strength	(at sea level for 1 min.) 5000 V _{RMS} coil to contact 2500 V _{RMS} between open contacts
Surge Voltage coil to contact	10 kV (at 1.2 x 50 μ s)
Insulation Resistance	1000 M Ω (min.) at 20°C, 500 VDC, 50% RH
Creepage coil to contact	≥ 10.0 mm
Clearance coil to contact	≥ 10.0 mm
Temperature Range operating	(at nominal coil voltage) -40°C (-40°F) to 85°C (185°F)
Vibration resistance Shock resistance	1.5 mm (0.062") DA at 10–55 Hz 10 g
Enclosure Terminals	P.B.T. polyester Tinned copper alloy, P. C.
Soldering max. temperature max. time	270 °C (518°F) 5 seconds
Cleaning max. solvent temp. max. immersion time	80°C (176°F) 30 seconds
Dimensions length width height (standard version) height (low profile)	38.0 mm (1,496") 33.0 mm (1,300") 43.0 mm (1,693") 41.5 mm (1,634")
Weight	85 grams (approx.)
Packing unit in pcs Compliance	10 per plastic tube / 150 per carton box UL 508, IEC 61810-1, RoHS, REACH

AZSR190

COIL VOLTAGE SPECIFICATIONS

Nominal Coil VDC	Must Operate VDC	Min. Holding VDC	Max. Cont. VDC	Resistance Ohm $\pm 10\%$
6	4.5	2.4	6.6	18.8
9	6.75	3.6	9.9	42.2
12	9.0	4.8	13.2	75.0
24	18.0	9.6	26.4	300

ORDERING DATA

AZSR190 -1A- D

Height
 nil: standard height (43.0 mm)
 L: low profile version (41.5 mm)

Nominal coil voltage
 see coil voltage specifications table

Switching capacity
 nil: standard version
 T: high current version

Example ordering data


AZSR190-1A-12D 12 VDC nominal coil voltage, standard height
 AZSR190T-1A-12D High current version, 12 VDC nom. coil voltage
 AZSR190-1A-9DL 9 VDC nominal coil voltage, low profile version

NOTES

- All values at 20°C (68°F).
- Relay may pull in with less than "Must Operate" value.
- Provide sufficient PCB cross section on load terminals. Recommended cross section according to IEC 61810-1:2015: 35 mm²
- Specifications subject to change without notice.


MECHANICAL DATA

Dimensions in mm. Tolerance: ± 0.5 mm unless otherwise stated

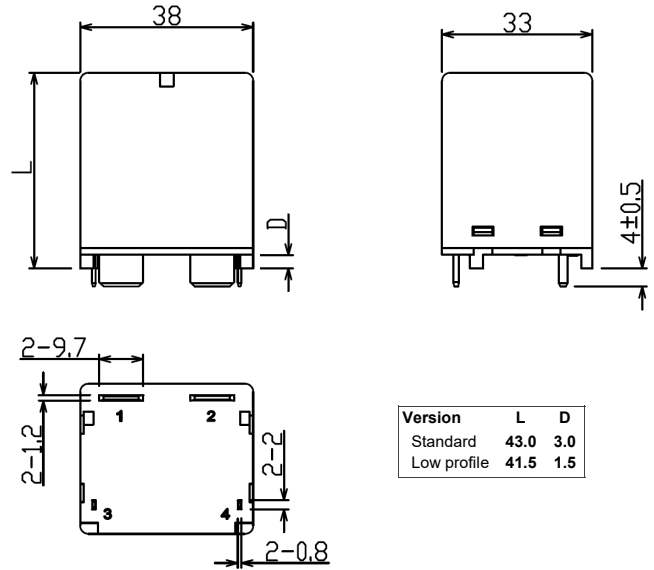

PC BOARD LAYOUT

Dimensions in mm. Tolerance: ± 0.1 mm unless otherwise stated
 Viewed towards terminals.

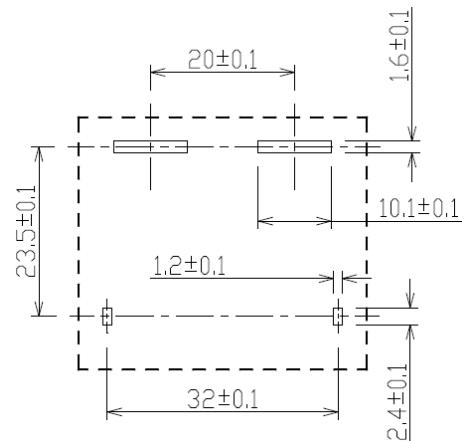

WIRING DIAGRAMS

Viewed towards terminals.

Note: Provide sufficient PCB cross section on load terminals. Recommended cross section according to IEC 61810-1: 35 mm².

